

Square Bollard Sleeve Specification Sheet


Material:

Low Density PE, ethylene hexene copolymer, LDPE resin is tailored for rotationally molded large hollow objects that require impact strength, warp resistance, stress crack resistance, and UV stabilization.

Reflective Tape: 3M Scotchlite Reflective Sheeting
Installation Strips: 2 foam strips

Installation:

Crisscross the two foam strips over the top of the bollard
Slide the bollard sleeve over the foam strips and the bollard

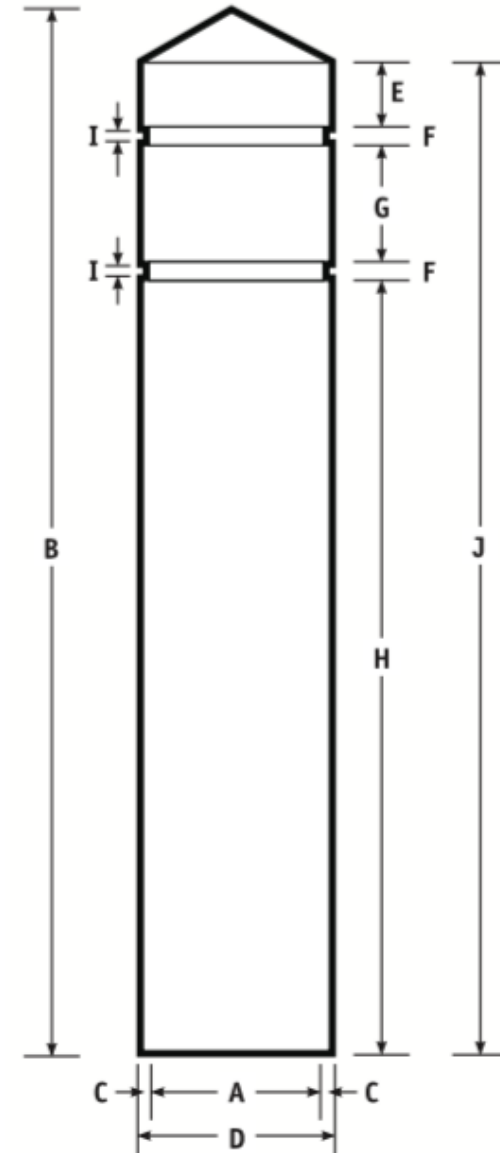

| | A | B | C | D | E | F | G | H | I | J |
|-------------------|--------------|---------------|-----------|--------------|------|--------|-------|-------|--------------|-----|
| | ID Width/Dia | Height/Length | Thickness | OD Width/Dia | | Recess | | | Reflect Tape | |
| 4.5" x 4.5" x 55" | 4.75 | 56 | .15 | 5 | 3.00 | .75 | 5.875 | 44.50 | .75w | 55" |
| 6.5" x 6.5" x 55" | 6.625 | 56 | .1875 | 7 | 2.00 | 1.0 | 4.875 | 46.25 | .75w | 55" |